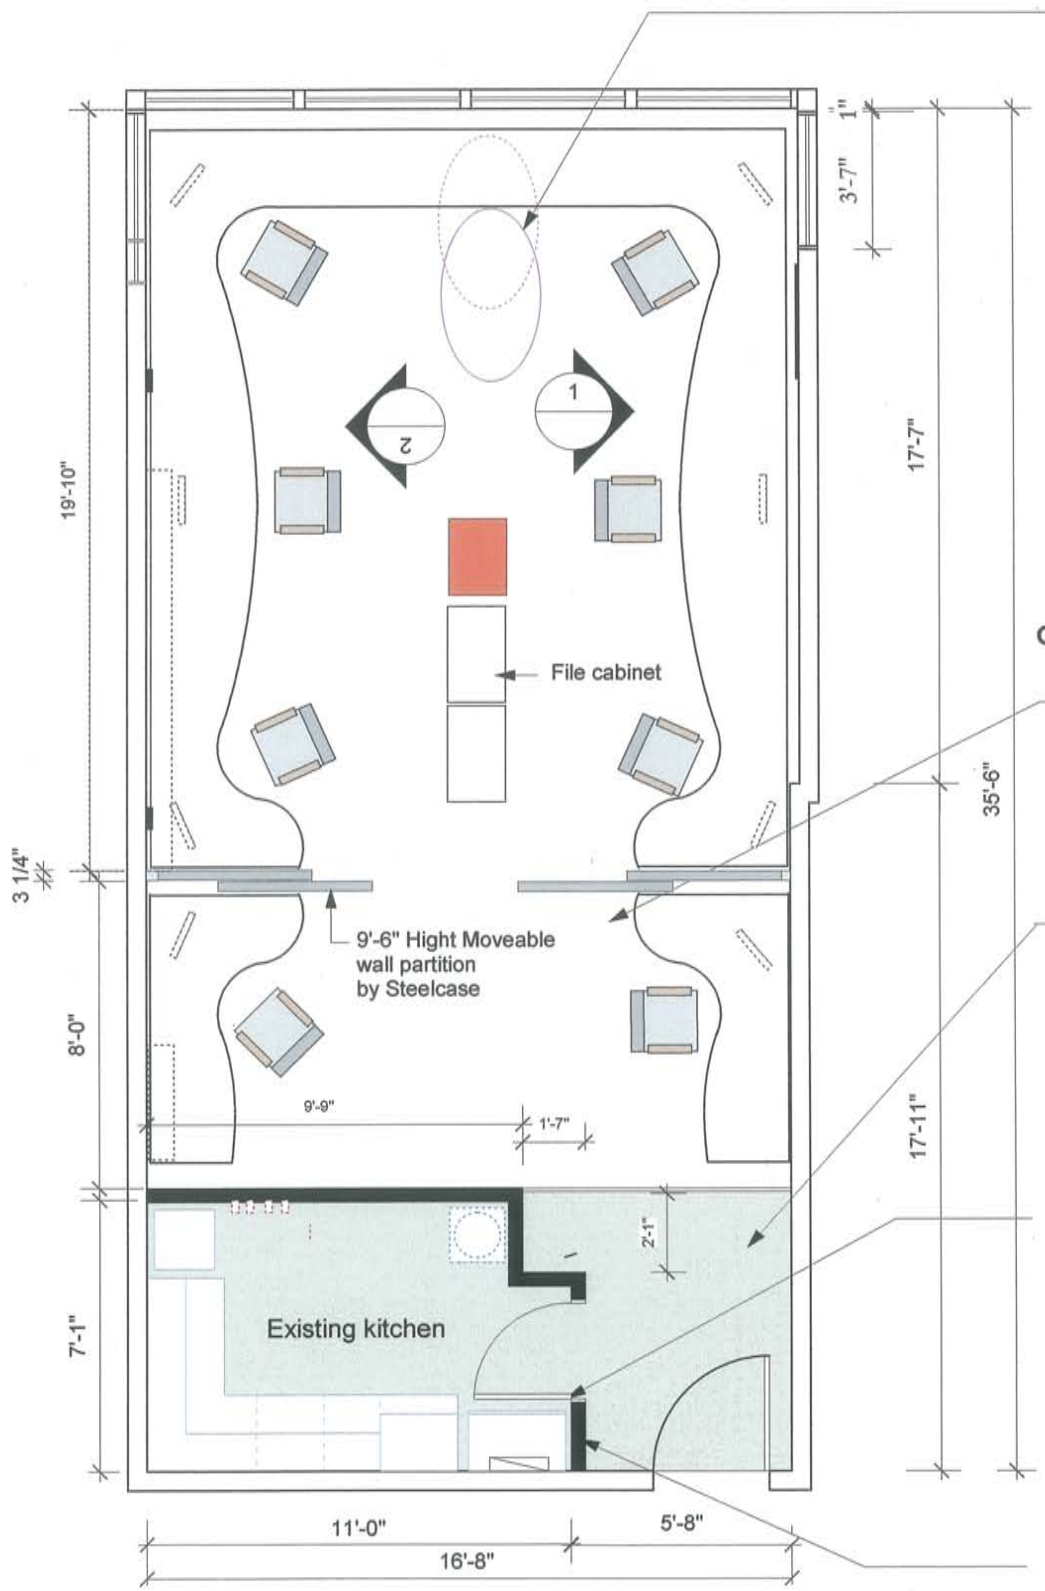

GENERAL SPECIFICATION

New carpet same as existing one
Intersect30 889011 potash

baseboard to be cut on both side to insert the slider wall

New linoleum flooring
to be glue on concrete floor

Marmoleum
Real 3049 papyrus white

120 square feet

transitional floor profil
aluminium
schluter reno ramp or substitute.

30`` french door clear glass
ready to be painted.

Hardware: weiser lock
Leverset- galiano
satin chrome finish

casing 3 .5`` to be paint

Baseboard to match existing one
ready to be painted

kitchen

9'-6" hight new wall, 2x4
metal
stud with 5/8"drywall, ready
to be paint.

PLAN